

## Single Channel USB Switch with Adjustable Current Limit

### ■ FEATURES

- 60m $\Omega$  High-Side MOSFET Switch.
- 85 $\mu$ A Quiescent Supply Current.
- 1 $\mu$ A Maximum Shutdown Supply Current.
- 3.5V to 5.5V Input Voltage Range.
- Open-Drain Over-Current Flag Output.
- Under-Voltage Lockout.
- Thermal / Short Circuit Protection.
- Fast Short Circuit Protection Response.
- Adjustable Current Limit : 0.5A ~ 2.4A
- Under Voltage Lockout Ensures that Switch is off at Start Up.
- Soft Start prevents large Inrush Current.
- Discharge function when shutdown active.
- No Reverse Current when Power off.
- Enable Active-High or Active-Low Version.
- Available in SOT23-6 Package.
- 2kV ESD Rating (Human Body Model)

### ■ APPLICATIONS

- USB Power Management
- High-Side Power Protection Switch
- Hot Plug-In Power Supplies
- Battery-Charger Circuits
- Portable Application.
- Digital televisions


### ■ DESCRIPTION

The AIC6152 is integrated 60m $\Omega$  high-side power switch for self-powered and bus-powered Universal Serial Bus (USB) applications. This switch operates with input ranging from 3.5V to 5.5V, making it ideal for 5V system.

The protection includes programmable current limiting with foldback, short circuit protection and thermal shutdown. The AIC6152 is ideal for any system where current limiting and power control are desired. The AIC6152 has low quiescent current and small package, which is particularly suitable in battery powered portable application.

Guaranteed minimum output rise time limits inrush current during hot plug-in as well as minimizing EMI and prevents the voltage at upstream port from dropping excessively.

## ■ TYPICAL APPLICATION CIRCUIT

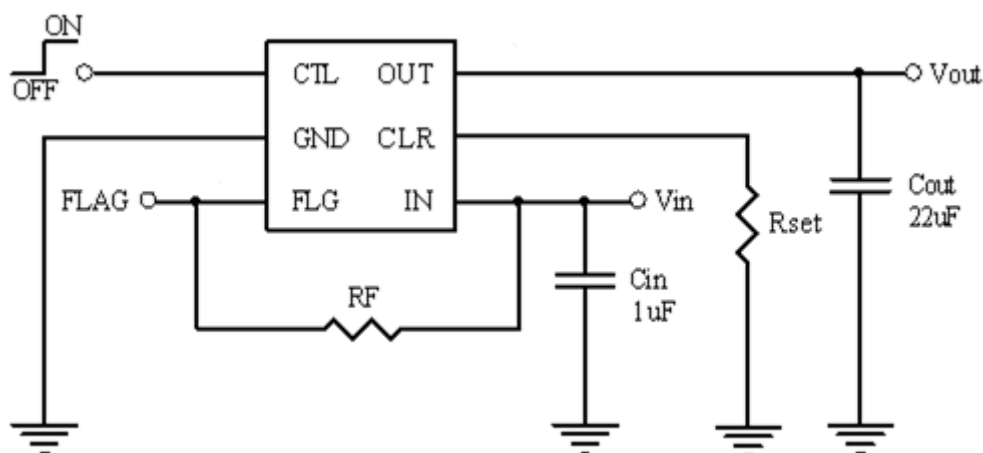

Typical Application Circuit

## ■ ORDERING INFORMATION

AIC6152XXXXXX

PACKING TYPE  
TR: TAPE & REEL  
BG: BAG

PACKAGING TYPE  
U6: SOT23-6

G: Green Package

CONTROL POLARITY  
L: Active Low  
H: Active High

### PIN CONFIGURATION

SOT23-6

FRONT VIEW

OUT CLR FLG

6 5 4

Marking

1 2 3

IN GND CTL

Note: Pin1 is determined by orienting the package marking as shown.

Example: AIC6152HGU6TR

→ Active High Version, in SOT23-6 Green Package  
and Taping & Reel Packing Type

### ● SOT23-6 Marking

| Part No. | Package Code | Marking | Control Polarity                        |
|----------|--------------|---------|-----------------------------------------|
| AIC6152x | GU6          | ILBxG   | x=L for active low, x=H for active high |

## ■ ABSOLUTE MAXIMUM RATINGS

|                                                                      |               |
|----------------------------------------------------------------------|---------------|
| Supply Voltage ( $V_{IN}$ ).....                                     | -0.3V ~ 6.5V  |
| CTL Input ( $V_{CTL}$ ).....                                         | -0.3V ~ 6.5V  |
| CLR, OUT Voltage.....                                                | -0.3V ~ 6.5V  |
| Fault Flag Voltage ( $V_{FLG}$ ).....                                | -0.3V ~ 6.5V  |
| Fault Flag Current ( $I_{FLG}$ ).....                                | 25mA          |
| Operating Temperature Range.....                                     | -40°C ~ 85°C  |
| Junction Temperature.....                                            | 125°C         |
| Storage Temperature Range.....                                       | -65°C ~ 150°C |
| Lead Temperature (Soldering, 10sec).....                             | 260°C         |
| Thermal Resistance, $\theta_{JC}$ (Junction to Case) SOT23-6.....    | 115°C/W       |
| Thermal Resistance, $\theta_{JA}$ (Junction to Ambient) SOT23-6..... | 250°C/W       |
| (Assume no Ambient Airflow, no Heatsink)                             |               |

**Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.**

## ■ ELECTRICAL CHARACTERISTICS

( $V_{IN}=5V$ ,  $C_{IN}=C_{OUT}=1\mu F$ ,  $T_A=25^{\circ}C$ , unless otherwise specified.) (Note 1)

| PARAMETERS                          | CONDITIONS                         | MIN. | TYP. | MAX. | UNIT        |
|-------------------------------------|------------------------------------|------|------|------|-------------|
| Supply Current                      |                                    |      | 85   | 170  | $\mu A$     |
| Shutdown Supply Current             |                                    |      | 0.1  | 1    | $\mu A$     |
| Input Voltage Range                 |                                    | 3.5  |      | 5.5  | V           |
| Output MOSFET Resistance            |                                    |      | 60   | 80   | $m\Omega$   |
| Output Turn-On Rise Time            | $R_L = 10\Omega$ each Output       |      | 250  |      | $\mu S$     |
| Output Turn-Off Fall Time           | $R_L = 10\Omega$ each Output       |      | 0.7  | 20   | $\mu S$     |
| Control Input Threshold             |                                    | 0.4  | 0.8  | 1.2  | V           |
| Current Limit                       | $R_{SET} = 0.885k\Omega$           | 2040 | 2400 | 2760 | mA          |
|                                     | $R_{SET} = 2.13k\Omega$            | 850  | 1000 | 1150 |             |
|                                     | $R_{SET} = 4.3k\Omega$             | 425  | 500  | 575  |             |
| Response time to short circuit      | $V_{IN} = 5.0V$ , $I_{CL}=2.0A$    |      | 2.2  |      | $\mu S$     |
| Output Leakage Current              | CTL='0', $V_{OUT}=0V$              |      | 0.5  | 1    | $\mu A$     |
| Over Temperature Shutdown Threshold | $T_J$ Increasing                   |      | 145  |      | $^{\circ}C$ |
|                                     | $T_J$ Decreasing                   |      | 125  |      |             |
| Under Voltage Lockout               | $V_{IN}$ Rising                    | 2.6  | 2.8  | 3.0  | V           |
| Under Voltage Lockout Hysteresis    |                                    | 50   | 200  | 400  | mV          |
| Over Current Flag Response Delay    | Apply $V_{OUT} = 0V$ until FLG low | 4    | 9    | 25   | ms          |
| FLG Output Low Voltage              | $I_{FLG}=5mA$                      |      | 0.1  | 0.5  | V           |
| FLG Off-State Current               |                                    |      |      | 1    | $\mu A$     |

Note1: Specifications are production tested at  $T_A=25^{\circ}C$ . Specifications over the  $-40^{\circ}C$  to  $85^{\circ}C$  operating temperature range are assured by design, characterization and correlation with Statistical Quality Controls (SQC).

## TYPICAL PERFORMANCE CHARACTERISTICS

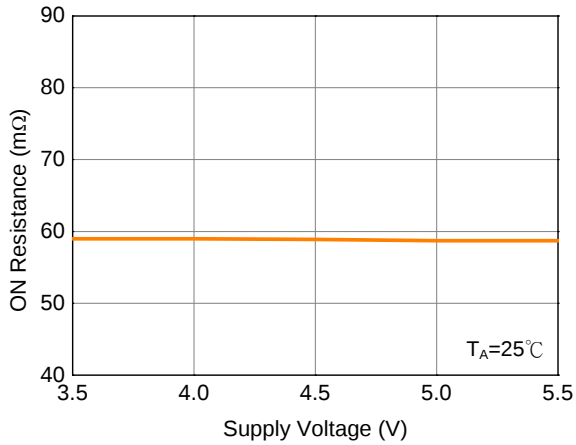


Fig. 1 ON Resistance vs. Supply Voltage

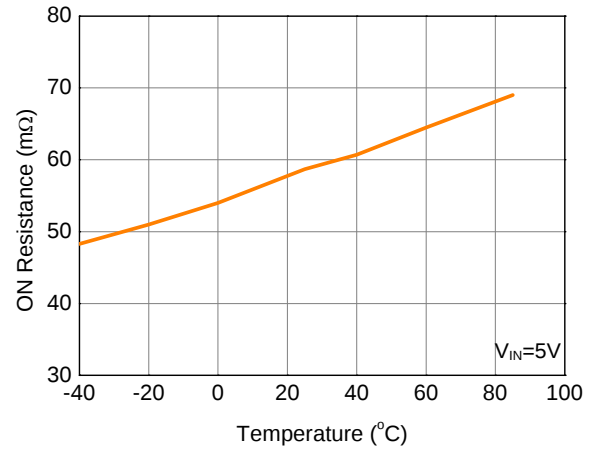


Fig. 2 ON Resistance vs. Temperature

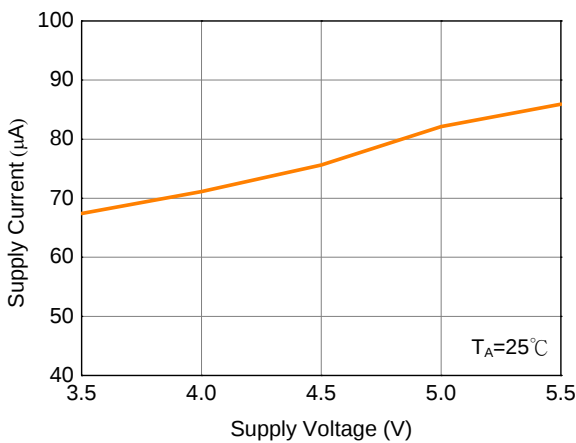


Fig. 3 Supply Current vs. Supply Voltage

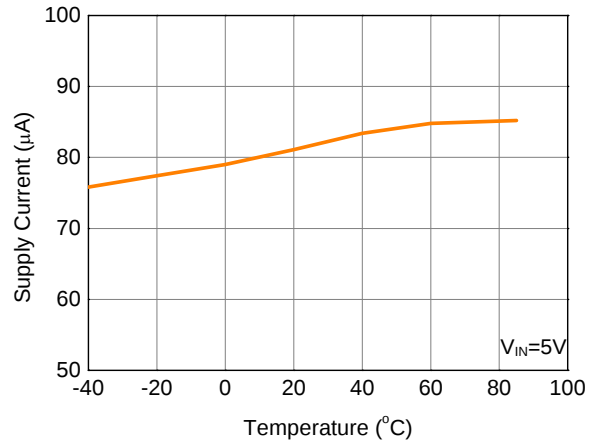


Fig. 4 Supply Current vs. Temperature

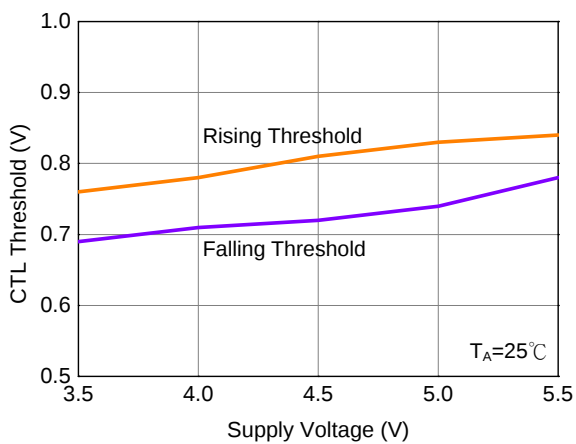


Fig. 5 CTL Threshold vs. Supply Voltage

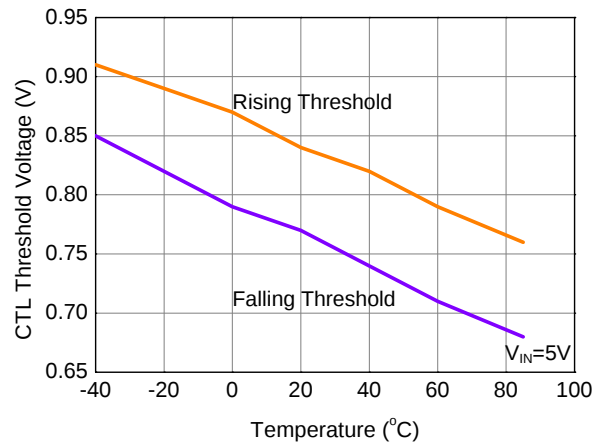


Fig. 6 CTL Threshold vs. Temperature

## ■ TYPICAL PERFORMANCE CHARACTERISTICS(Continued)

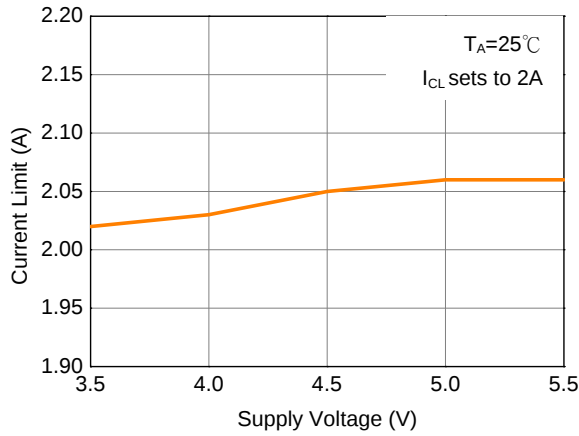


Fig. 7 Current Limit vs. Supply Voltage

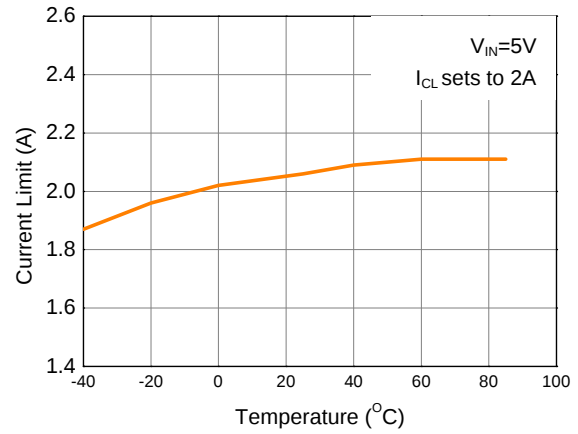


Fig. 8 Current Limit vs. Temperature

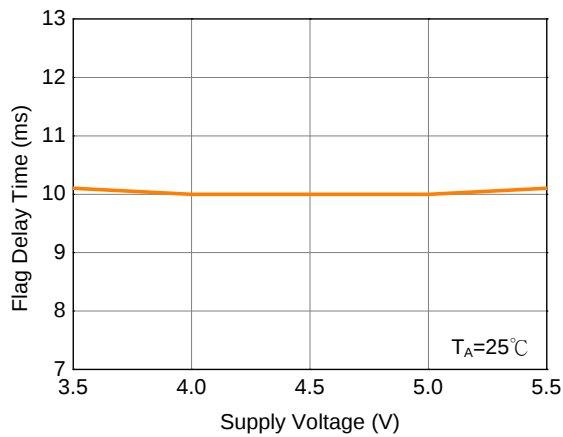


Fig. 9 Flag Delay Time vs. Supply Voltage


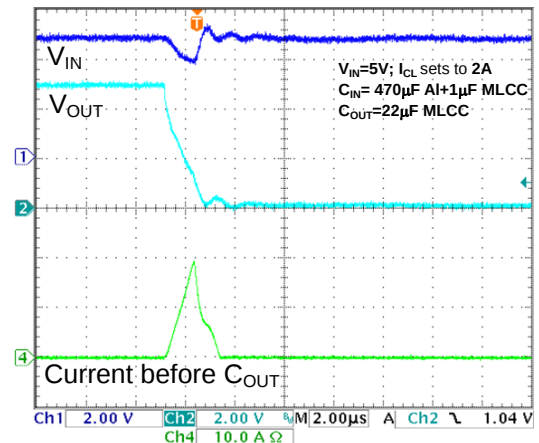


Fig. 10 Short Circuit Protection Response ( $I_{CL}$  sets to 2A)

## ■ FUNCTIONAL BLOCK DIAGRAM

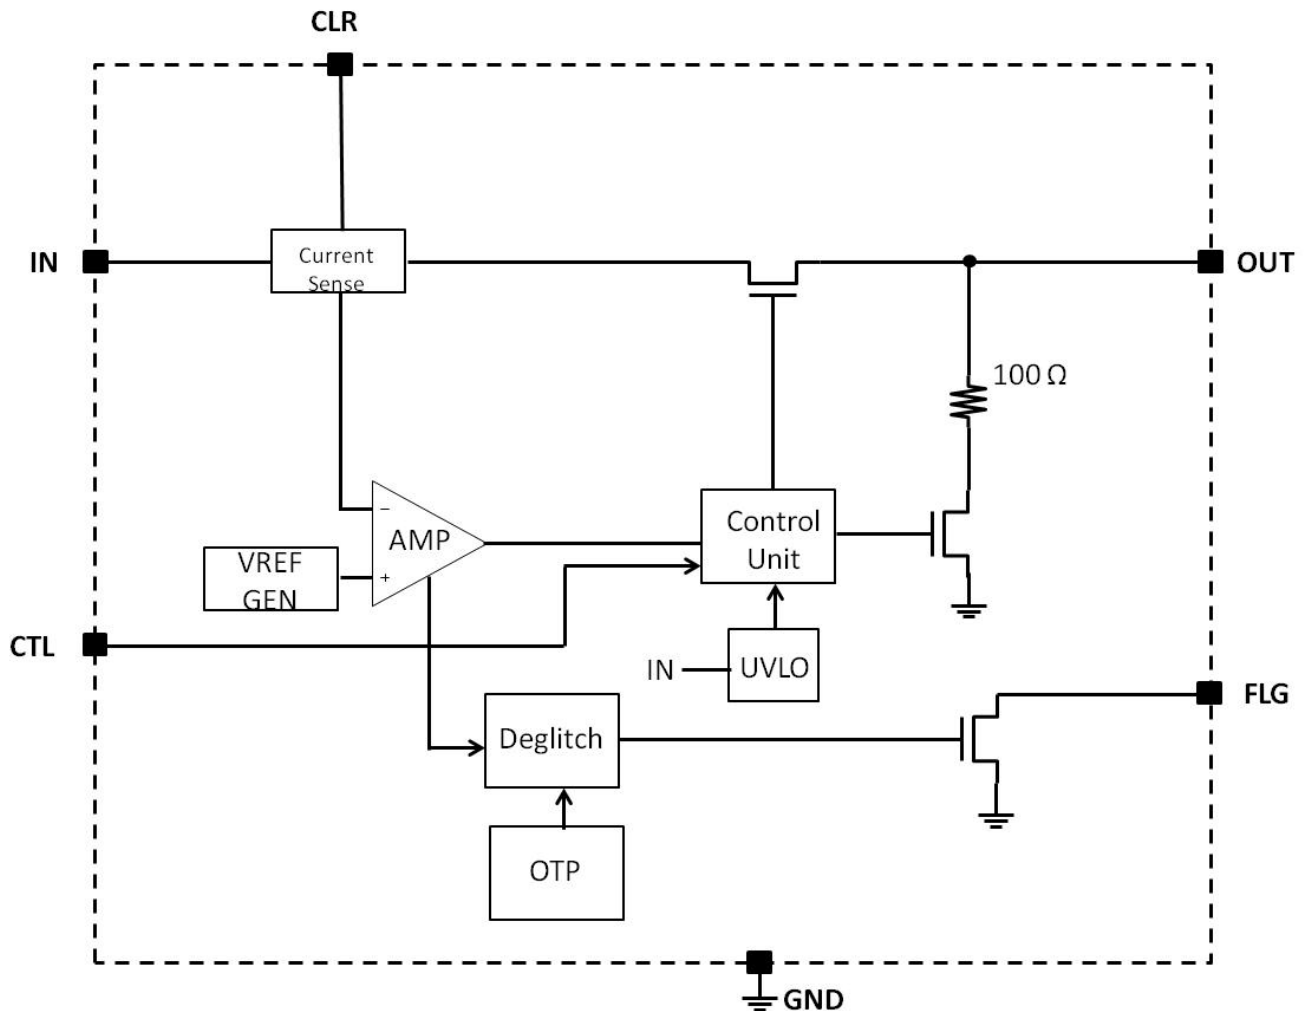

Functional Block Diagram of AIC6152

## ■ PIN DESCRIPTIONS

- IN PIN : Power supply input.
- GND PIN : Chip power ground.
- CTL PIN : Switch Enable.
- FLG PIN : Fault status. A logic low on this pin indicates the switch is in current limit, or has been shutdown by the thermal protection circuit.
- CLR PIN : Sets the current limit threshold via a resistor connected between CLR and GND.
- OUT PIN : MOSFET switch output.

## ■ APPLICATION INFORMATION

### Flag Output

An error Flag is an open-drained output of an N-channel MOSFET. Flag output is pulled low to signal the following fault conditions: output current limit and thermal shutdown. The current limit flag response delay time is about 9ms.

### Current Limit

The AIC6152 has current limit function. It protects the output MOSFET switches from damage resulting from undesirable short circuit conditions or excess inrush current, which is often encountered during hot plug-in. The error flag signals when any current limit conditions occur. The current limit threshold can be set by the resistor,  $R_{SET}$ , connecting between CLR pin and GND pin and can be approximated by the following equation.

$$I_{LIMIT(yp)} = 2.1136 \times [R_{SET}(k\Omega)]^{-0.9858}$$

### Thermal Shutdown

The AIC6152 includes an over temperature protection circuit, which is designed to protect the device. The over temperature shutdown threshold can change according to the state of the current limit protection function. If the current limit protection function does not be activated, the over temperature shutdown threshold is about 145°C. In the current limit protection condition, the over temperature shutdown threshold can reduce to about 125°C. When the junction temperature exceeds the over temperature shutdown threshold, the over temperature protection function turns off the power switch and signals the error flag. The over temperature protection hysteresis prevents the power switch from turning on until the junction temperature has dropped about 20°C.

### CTL Control

CTL (Control input) must be driven logic high or logic

low for a clearly defined input. Floating the input may cause unpredictable operation.

### Under-Voltage Lockout

UVLO (under voltage lockout) prevents the output MOSFET from turning on until input voltage exceeds 2.8V typically. After the switch turns on, if the input voltage drops below 2.6V typically, UVLO shuts off the output MOSFET.

### Supply Filtering

A 1μF bypass capacitor from USB IN to GND, located near the device, is strongly recommended to control supply transients. Without a bypass capacitor, an output short may cause sufficient ringing on the input (from supply lead inductance) to damage internal control circuitry.

### Transient Requirements

USB supports dynamic attachment (hot plug-in) of peripherals. A current surge is caused by the input capacitance of downstream device. Ferrite beads are recommended in series with all power and ground connector pins. Ferrite beads reduce EMI and limit the inrush current during hot-attachment by filtering high-frequency signals.

### Short Circuit Transient


Bulk capacitance provides the short-term transient current needed during a hot-attachment event. A 22μF/10V ceramic capacitor mounted close to downstream connector each port should provide transient drop protection.

### Printed Circuit Layout

1. The power circuitry of USB printed circuit boards requires a customized layout to maximize thermal dissipation and to minimize voltage drop and EMI.
2.  $R_{SET}$  should be set as close to CLR pin as possible.

# **PHYSICAL DIMENSIONS** (unit: mm)

## **SOT23-6**

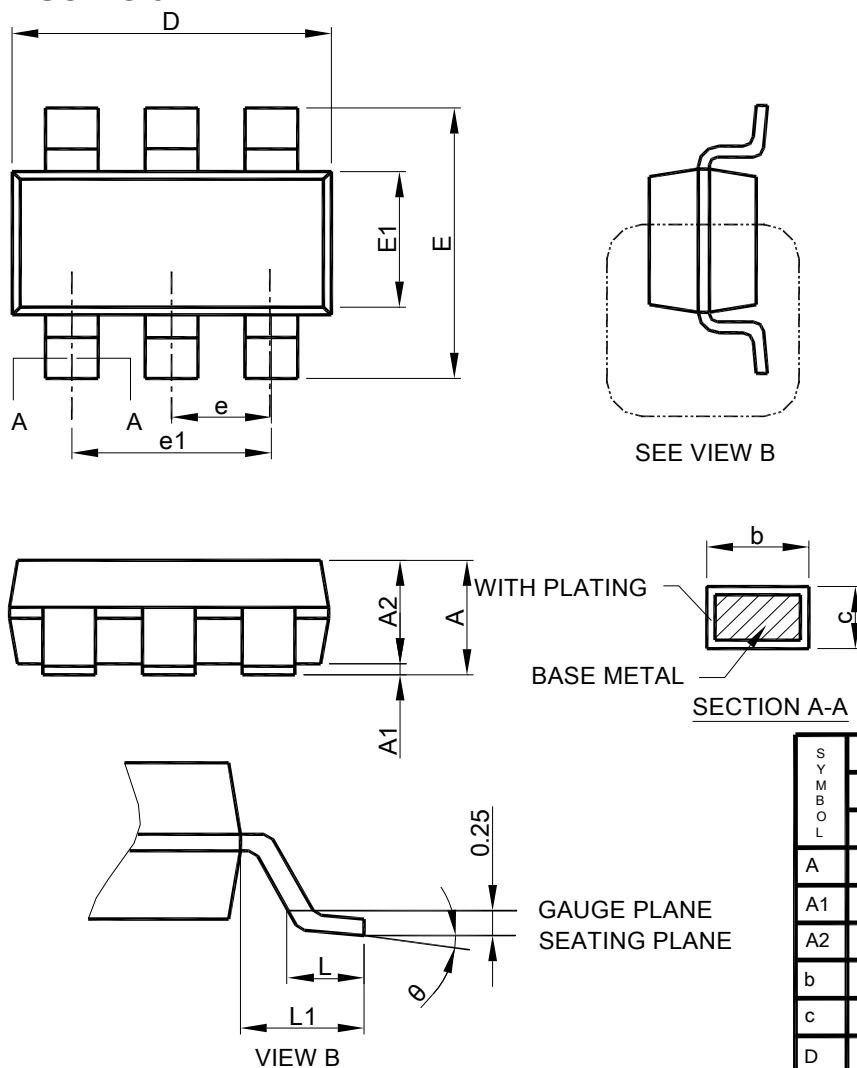

Note : 1. Refer to JEDEC MO-178AB.

2. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 10 mil per side.
3. Dimension "E1" does not include inter-lead flash or protrusions.
4. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.

| SYMBOL | SOT23-6     |      |
|--------|-------------|------|
|        | MILLIMETERS |      |
|        | MIN.        | MAX. |
| A      | 0.95        | 1.45 |
| A1     | 0.00        | 0.15 |
| A2     | 0.90        | 1.30 |
| b      | 0.30        | 0.50 |
| c      | 0.08        | 0.22 |
| D      | 2.80        | 3.00 |
| E      | 2.60        | 3.00 |
| E1     | 1.50        | 1.70 |
| e      | 0.95 BSC    |      |
| e1     | 1.90 BSC    |      |
| L      | 0.30        | 0.60 |
| L1     | 0.60 REF    |      |
| θ      | 0°          | 8°   |

## **Note:**

Information provided by AIC is believed to be accurate and reliable. However, we cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an AIC product; nor for any infringement of patents or other rights of third parties that may result from its use. We reserve the right to change the circuitry and specifications without notice.

Life Support Policy: AIC does not authorize any AIC product for use in life support devices and/or systems. Life support devices or systems are devices or systems which, (i) are intended for surgical implant into the body or (ii) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the use.